

Product Specification

CA-40

Standard Multi Purpose Flooring Adhesive

SECTION I - PRODUCT IDENTIFICATION

Manufacturer's Name: Capitol Adhesives
Address: PO Box 2023; 300 Cross Plains Blvd.
Dalton, GA 30722
Telephone No.: 1-800-831-8381
Product Class: Latex Based Flooring Adhesive
Product Identity: CA-40 Standard Multi Purpose
Flooring Adhesive

SECTION II - HAZARDOUS COMPONENTS

None Per OSHA Regulation: 29CFR1910.1200
None Per SARA Title III, Section 313 and TSCA 40
CRF 372

SECTION III - PHYSICAL DATA

Initial Boiling Point: 212°F
Vapor Pressure: Same as water
Vapor Density: Same as water
Specific Gravity: 1.18
Percent Volatiles: 48%
VOC: 0 g/l

SECTION IV - FIRE AND EXPLOSION DATA

Flash Point: NA
Explosive Limit: NA
Extinguishing Media: NA
Unusual Fire and Explosion Hazards: None
Special Fire Fighting Procedures: None

SECTION V - HEALTH HAZARD DATA

Symptoms of Over Exposure:

| | |
|-------------|--------------------------|
| Inhalation: | None Known |
| Eyes: | Possibly Mild Irritation |
| Skin: | None Known |
| Ingestion: | Possible G.I. Blockage |

FIRST AID: **Skin:** Soap and water. **Eyes:** Flush with water. **Inhalation:** Remove to fresh air if necessary.

SECTION VI - REACTIVITY DATA

| | |
|---------------------------|------------|
| Stability: | Stable |
| Incompatibility: | None |
| Hazardous Decomposition: | None |
| Hazardous Polymerization: | None |
| Conditions to Avoid: | None Known |

SECTION VII - SPILL OR LEAK PROCEDURES

Absorb and solidify with sawdust or vermiculite. Solidified materials accepted for landfill disposal in most location. Check all local, state, and federal regulations.

SECTION VIII - PROTECTIVE EQUIPMENT

No safety equipment required other than goggles.

SECTION IX - SPECIAL PRECAUTIONS

Protect from freezing.
KEEP OUT OF REACH OF CHILDREN.



Capitol Adhesives, Inc.
PO Box 2023
300 Cross Plains Blvd.
Dalton, Georgia 30720




Product Specification

CA-40

Contract Multi Purpose Flooring Adhesive



CA-40 Contract Multi Purpose Flooring Adhesive is formulated to accommodate the most common carpet backings such as ActionBac® and Jute. CA-40 is calculated "0" VOC's meaning it contains no solvents. This low odor adhesive is fast tacking with excellent retack properties. CA-40 is light in color and warranted against the yellowing of felt backed vinyl sheet goods.

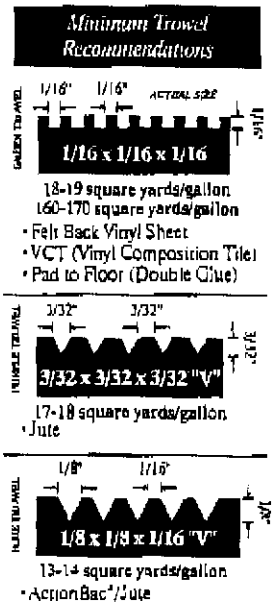

| | |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description: | Contract Multi Purpose Flooring Adhesive |
| Base: | Synthetic rubber and resins |
| Solvent: | Water |
| Flammability: | Non-Flammable |
| Open Time: | 30-60 minutes - very wide tack range |
| Coverage: | 13-14 square yards per gallon for average installation |
| Clean Up: | Water while adhesive is still wet; safety solvent or mineral spirits when dry |
| Shelf Life: | One year in closed container |
| Limitations: | Do not subject adhesive to temperatures below +10°F. If frozen warm to at least 70°F and stir before using. For interior use only. |
| Packaging: | 4 Gallon |
| Application: | See chart for recommended trowel sizes and approximate coverages. |
| First Aid: | <p>Skin: Wash exposed area thoroughly with soap and water.</p> <p>Eyes: Flush with large amounts of water, lifting upper and lower lids occasionally.</p> <p>Ingestion: Do not induce vomiting. Call a physician immediately. Use only in well ventilated areas.</p> |